

Technical specifications: DKV Series



- High efficiency


- Light and compact

- Low noise and vibration



MODEL	DKV-06R	DKV-07G	DKV-08R	DKV-10R	DKV-11G	DKV-14G
DISPLACEMENT	60cm ³ /rev.	70cm ³ /rev.	80cm ³ /rev.	105cm ³ /rev.	110cm ³ /rev.	140cm ³ /rev.
NUMBER OF CYLINDERS	5	5	5	5 vanes	5 vanes	5 vanes
RANGE	800-7000	800-7000	800-7000	800-7000	800-7000	800-7000
REFRIGERANT	HFC-134a	HFC-134a	HFC-134a	HFC-134a	HFC-134a	HFC-134a
OIL	ZXL 200PG	ZXL 200PG	ZXL 200PG	ZXL 200PG	ZXL 200PG	ZXL 200PG
WEIGHT	3.4kg (with clutch)	3.1kg (with clutch)	4.0kg (with clutch)	4.0kg (with clutch)	5.1kg (with clutch)	7.4kg (with clutch)
MOUNT	Direct	Vertical	Direct	Direct	Direct	Direct

PERFORMANCE CURVES: DKV Series

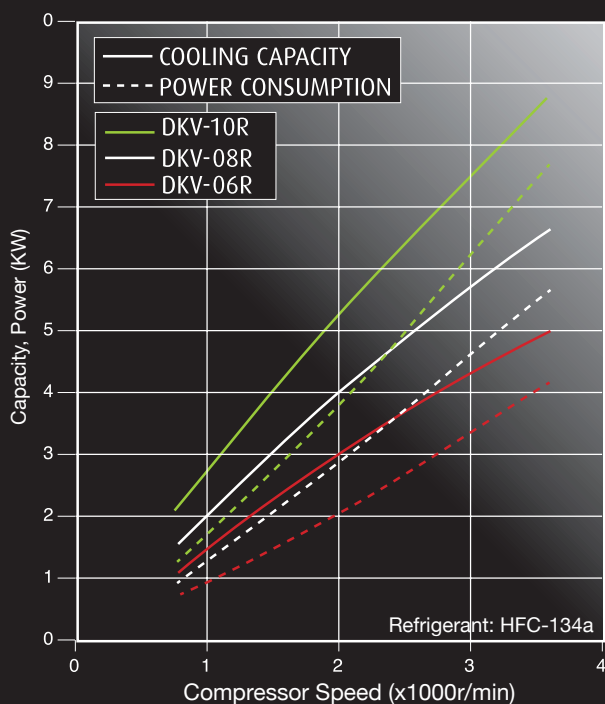


TEST CONDITIONS

Discharge pressure: 1.52MPa (gage)

Suction pressure : 0.18MPa (gage)

Sub cool : 5°C Super heat : 10°C

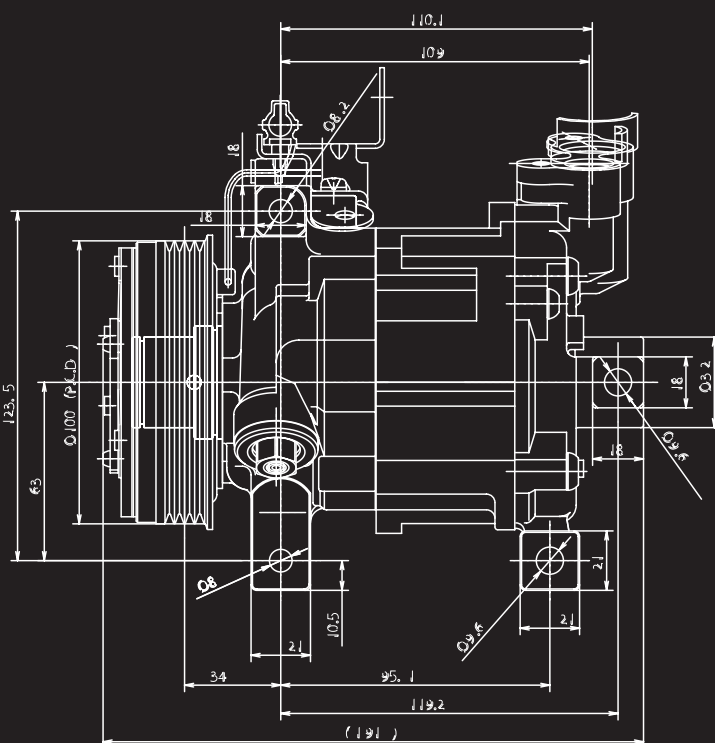

DKV-10R Design

