

Technical specifications: DKP-12




Reciprocating crank shaft compressor
 -Proven ultra robust technology
 -Light weight reciprocating type product




www.valeocompressors.com

MODEL	DKP-12/ TM-125
DISPLACEMENT	125cm ³ /rev.
NUMBER OF PISTONS	2
RANGE	700-4200
REFRIGERANT	HFC-134a/HFC-404A
OIL	ZXL 100PG PAG/ POE 500cm ³
WEIGHT	9.1Kg (with clutch)
MOUNT	Direct

PERFORMANCE CURVES: DKP-12

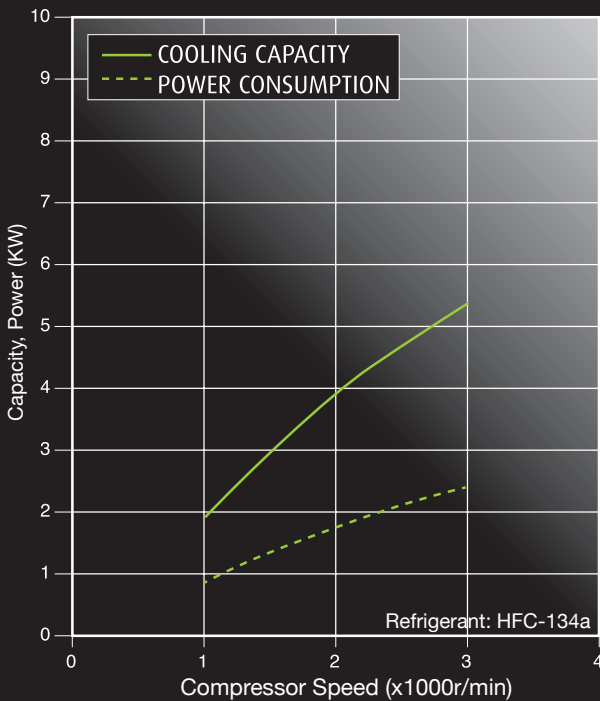

TEST CONDITIONS
 Discharge pressure: 1.52MPa (gage)
 Suction pressure : 0.18MPa (gage)
 Sub cool :5°C Super heat : 10°C

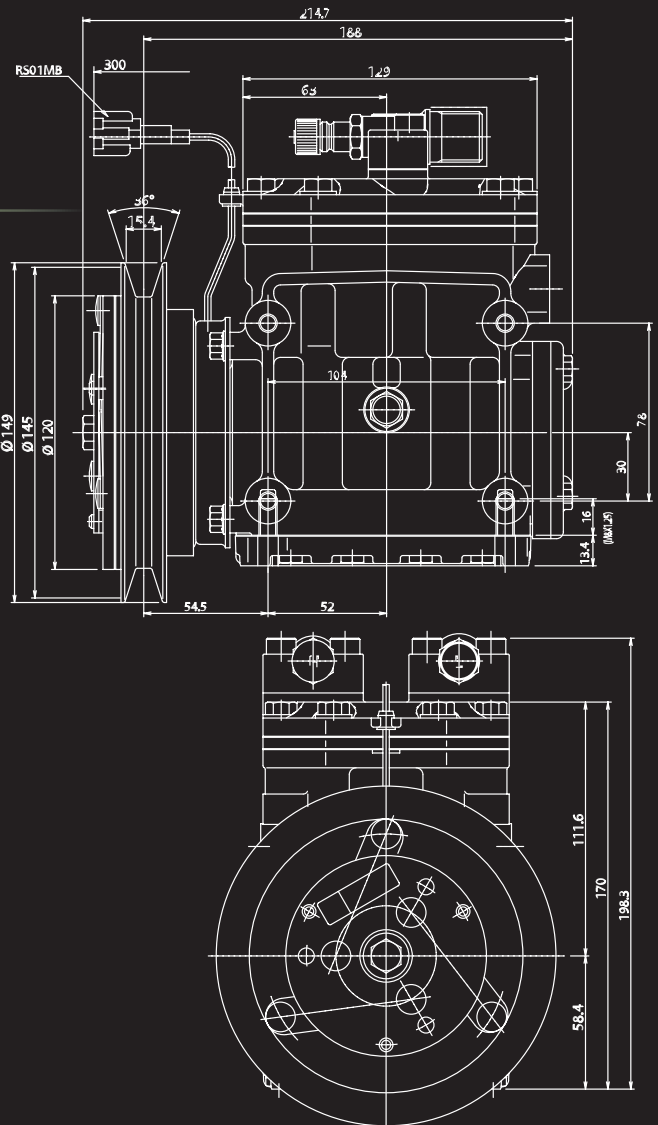

Technical specifications: DKP-19/ DKP-23




- 3 pistons compact reciprocating compressors
- Ultra robust & field serviceable
- Suitable for both standard and critical applications



www.valeocompressors.com

MODEL	DKP-19	DKP-23
DISPLACEMENT	189cm ³ /rev.	226cm ³ /rev.
NUMBER OF PISTONS	3	3
RANGE	700-4200	700-4200
REFRIGERANT	HFC-134a/HFC-404A	HFC-134a/HFC-404A
OIL	ZXL 100PG PAG/ POE 750cm ³	ZXL 100PG PAG/ POE 750cm ³
WEIGHT	13.2Kg [with clutch]	14.4Kg [with clutch]
MOUNT	Direct	Direct

PERFORMANCE CURVES: DKP-19/ DKP-23

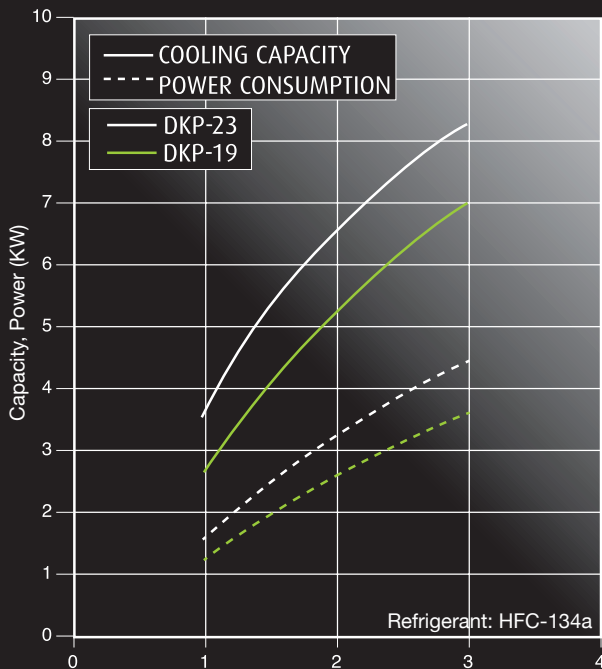

TEST CONDITIONS

Discharge pressure: 1.52MPa (gage)
 Suction pressure : 0.18MPa (gage)
 Sub cool :5°C Super heat : 10°C

